

Two-channel HDCVI Fiber Transceiver

User's Manual

V1.0.0

Important Safeguards and Warnings

Please read the following safeguards and warnings carefully before using the product in order to avoid damages and losses.

Note

- Do not expose the device to lampblack, steam or dust. Otherwise it may cause fire or electric shock.
- Do not install the device at position exposed to sunlight or in high temperature. Temperature rise in device may cause fire.
- Do not expose the device to humid environment. Otherwise it may cause fire.
- The device must be installed on solid and flat surface in order to guarantee safety under load and earthquake. Otherwise, it may cause device to fall off or turnover.
- Do not place the device on carpet or quilt.
- Do not block air vent of the device or ventilation around the device. Otherwise, temperature in device will rise and may cause fire.
- Do not place any object on the device.
- Do not disassemble the device without professional instruction.

Warning

- Please use battery properly to avoid fire, explosion and other dangers.
- Please replace used battery with battery of the same type.
- Do not use power line other than the one specified. Please use it properly. Otherwise, it may cause fire or electric shock.

Special Announcement

- This manual is for reference only.
- All the designs and software here are subject to change without prior written notice.
- All trademarks and registered trademarks are the properties of their respective owners.
- If there is any uncertainty or controversy, please refer to the final explanation of us.
- Please visit our website for more information.

Table of Contents

1	Product Overview	- 1 -
1.1	Product Model	- 1 -
1.2	Features	- 1 -
1.3	Typical Application	- 2 -
2	Device Structure	- 3 -
2.1	Front Panel	- 3 -
2.2	Rear Panel.....	- 5 -
	Appendix 1 Technical Specifications	- 7 -
	Appendix 2 Toxic or Hazardous Materials or Elements	- 9 -

1 Product Overview

1.1 Product Model

The manual is designed for two products which are two-channel standard HDCVI optical transceiver and two-channel multi-service HDCVI optical transceiver.

1.2 Features

Common features are as follows:

- High definition, lossless, real time, non-compression.
- Metal plate or proximate matter is used for the structure, fully enclosed dustproof design.
- Temperature design: - 40°C-75°C
- UPnP with simple installation.
- LED status indicator shows the working condition of optical transceiver.
- Support video format 720p/25, 720p/30, 720p/50, 720p/60, 1080p/25, and 1080p/30.

Unique features for two-channel multi-service HDCVI optical transceiver:

- Support audio input/output.
- Support on-off signal input/output.
- Support 1*10/100Mbps RJ 45 port.

1.3 Typical Application

The typical application of HDCVI fiber transceiver is shown in 错误! 未找到引用源。

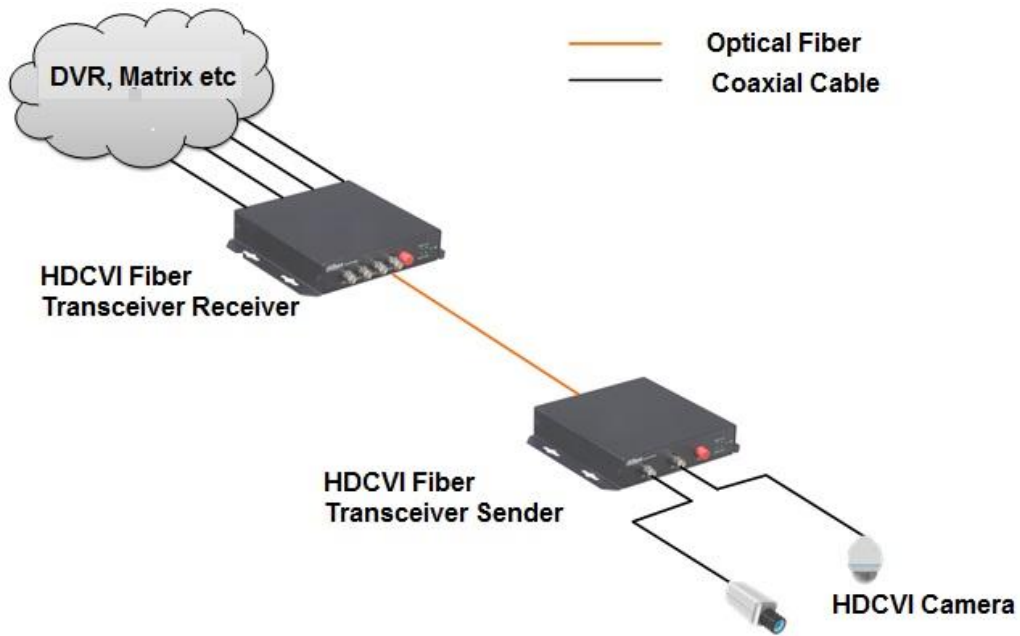


Figure 1- 1

2 Device Structure

2.1 Front Panel

This section will take two-channel standard HDCVI fiber transceiver as an example to introduce the front panel. Both two-channel multi-service HDCVI fiber transceiver and two-channel standard HDCVI fiber transceiver have the same front panel.

Sender

The front panel of sender is shown in Figure 2- 1.

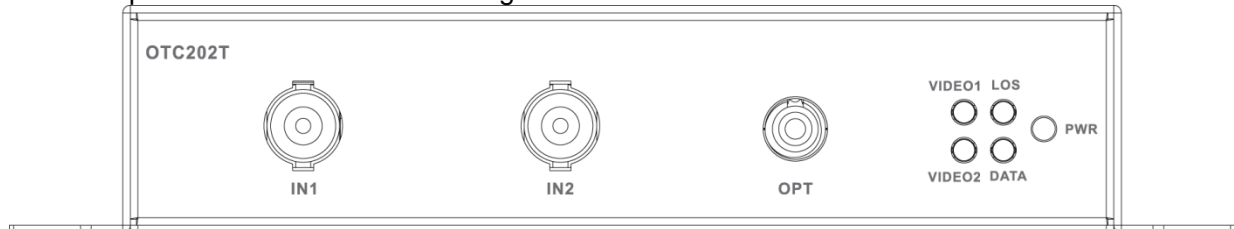


Figure 2- 1

For indicator, please refer to 错误! 未找到引用源。 . For other ports, please refer to 错误! 未找到引用源。

Indicator	Description	Color	Status
PWR	Power status indicator	Green	Power connection is normal
VIDEO 1	BNC video input indicator	Green	Video input is normal
VIDEO 2	BNC video input indicator	Green	Video input is normal
LOS	Fiber status indicator	Green	Fiber connection is normal
DATA	RS485 data transmission indicator	Flashing green	Transmitting data

Port	Description
IN 1	Video input port
IN 2	Video input port
OPT	Fiber port

Sheet 2-2

Receiver

The front panel of receiver is shown in Figure 2- 1

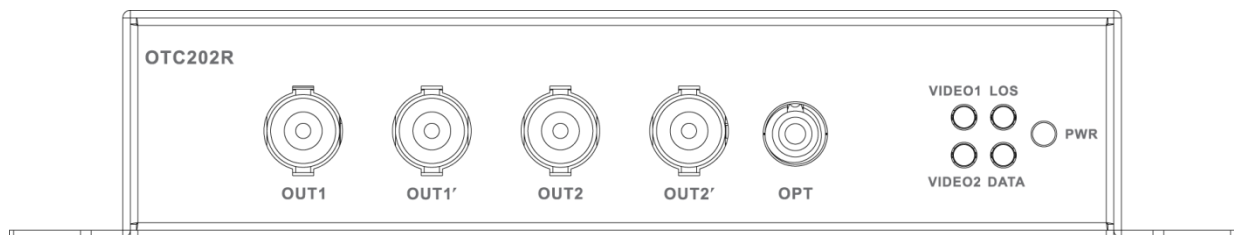


Figure 2- 1

For indicator, please refer to 错误! 未找到引用源。 . For other ports, please refer to 错误! 未找到引用源。

Indicator	Description	Color	Status
PWR	Power status indicator	Green	Power connection is normal
LOS	Fiber status indicator	Green	Fiber connection is normal
VIDEO 1	Fiber video signal indicator	Green	Fiber video signal is normal, that is to say sender IN1 video signal is normal.
VIDEO 2	Fiber video signal indicator	Green	Fiber video signal is normal, that is to say sender IN2 video signal is normal.
DATA	RS485 data transmission indicator	Flashing green	Transmitting data

错误! 未找到引用源。

Port	Description
OPT	Fiber Port
OUT1	HDCVIV video output port
OUT1'	HDCVI video loop output port
OUT2	HDCVI video output port
OUT2'	HDCVI video loop output port

错误！未找到引用源。

2.2 Rear Panel

The rear panel of two-channel standard HDCVI fiber transceiver is shown in figure 2-3 and 2-4. Both the sender and the receiver of two channel standard HDCVI fiber transceiver have the same rear panel interface structure.

The rear panel of standard HDCVI fiber transceiver is shown in Figure 2- .

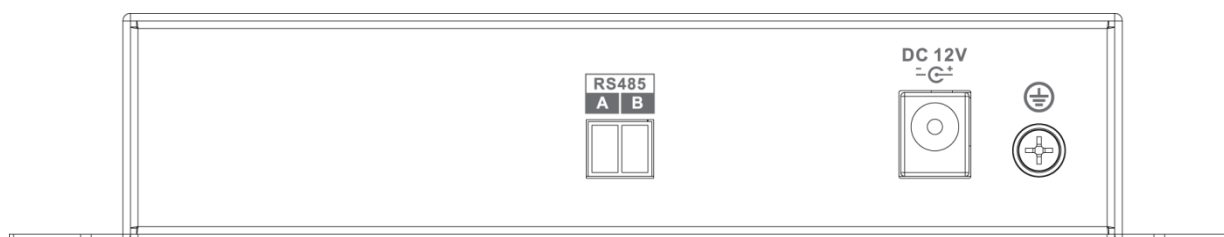


Figure 2- 3

For ports, please refer to sheet 2-5

Port	Description
DC12V	Power port, DC12V 1A
RS485	RS485 control data

错误！未找到引用源。

The rear panel of two-channel multi-service HDCVI fiber transceiver is shown in Figure 2- . Both the sender and the receiver of two-channel multi-service HDCVI fiber transceiver have the same rear panel interface structure.

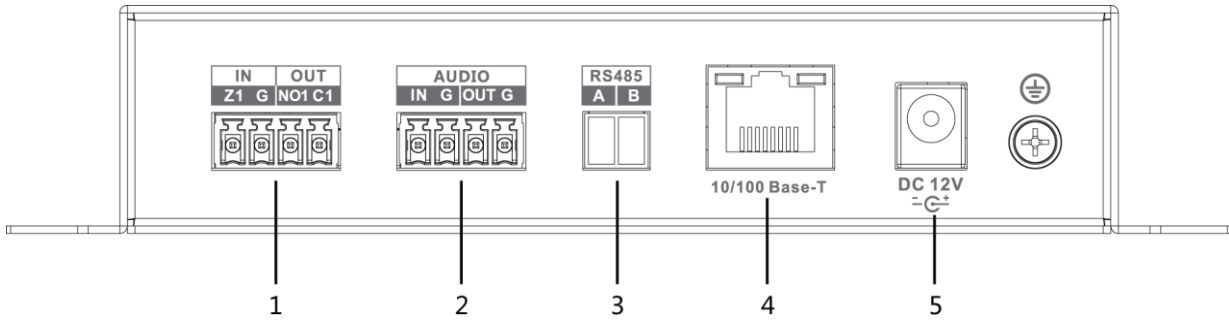


Figure 2-

For ports, please refer to sheet 2-6

Number	Name	Description
1	IN/OUT	On-off signal in/out
2	AUDIO	Audio in/out
3	RS485	RS485 control data
4	10/100 Base-T	One 100Mbps RJ45 port
5	DC 12V	Power port, DC12V 1A

错误！未找到引用源。

Appendix 1 Technical Specifications

Product Model	OTC202T/R (Standard Version)	OTC205T/R (Multi-service)
Optical Index		
Physical Port	FC port, single mode and single fiber	
Transmission Distance	0km~20km	
Input/output Wave Length	Sender (OTC202T/OTC205T) : 1550nm send 1310nm receive; Receiver (OTC202R/OTC205R) : 1310nm send 1550nm receive	
HDCVI Video Index		
Physical Port	Sender (OTC202T) : 2*BNC、1*RS485 Receiver (OTC202R) : 4*BNC、1*RS485	Sender (OTC205T) : 2*BNC、1*RS485、1* audio input、1* audio output, one channel on-off signal input, one channel on-off signal output, 1*RJ45 10/100Mbps Receiver (OTC205R) : 4*BNC、1*RS485、1* dual-way audio, 1*audio output, one channel on-off signal input, one channel on-off signal output, 1*RJ45 10/100Mbps
Sender Input Electrical Level	>500mVp-p	
Receiver Output Electrical Level	1Vp-p	
Input Auto Cable Balance	1080p: 75-5 coaxial cable support 300m 720p : 75-5coaxial cable support 500m	
Sender Input Reflection Loss	>15dB	
Input/Output Impedance	75Ohm	
Video Bandwidth	45MHz	
Sampling Bandwidth	10bit	
Sampling Frequency	108MHz	
HDCVI Audio Index		
Sampling Bandwidth	N/A	16bit
Audio Sampling Frequency	N/A	48KHz
HDCVI Coaxial Control Data Index		
Work Mode	Half-duplex	
Error Rate	<10 ⁻⁹	
Baud Rate	1200-9600bps	
Other		

Indicator	Light linker indicator, power indicator, RS485 data transmission indicator, video indicator
Power	DC12V 1A
Power Consumption	≤8W
Humidity	10%~90%
Temperature	- 40℃~75℃
Unit Weight	200g
Dimension	162mm×136.4mm×30mm
Installation	Wall mount

Appendix 2 Toxic or Hazardous Materials or Elements

Component Name	Toxic or Hazardous Materials or Elements					
	Pb	Hg	Cd	Cr VI	PBB	PBDE
Circuit Board Component	○	○	○	○	○	○
Device Case	○	○	○	○	○	○
Wire and Cable	○	○	○	○	○	○
Packing Components	○	○	○	○	○	○
Accessories	○	○	○	○	○	○

O: Indicates that the concentration of the hazardous substance in all homogeneous materials in the parts is below the relevant threshold of the SJ/T11363-2006 standard.

X: Indicates that the concentration of the hazardous substance of at least one of all homogeneous materials in the parts is above the relevant threshold of the SJ/T11363-2006 standard. During the environmental-friendly use period (EFUP) period, the toxic or hazardous substance or elements contained in products will not leak or mutate so that the use of these (substances or elements) will not result in any severe environmental pollution, any bodily injury or damage to any assets. The consumer is not authorized to process such kind of substances or elements, please return to the corresponding local authorities to process according to your local government statute.

Note

- **This user's manual is for reference only.**
- **Slight difference may be found in user interface.**
- **All the designs and software here are subject to change without prior written notice.**
- **All trademarks and registered trademarks are the properties of their respective owners.**
- **If there is any uncertainty or controversy, please refer to the final explanation of us.**
- **Please visit our website for more information.**