Dahua IR Wi-Fi Bullet Camera Quick Start Guide
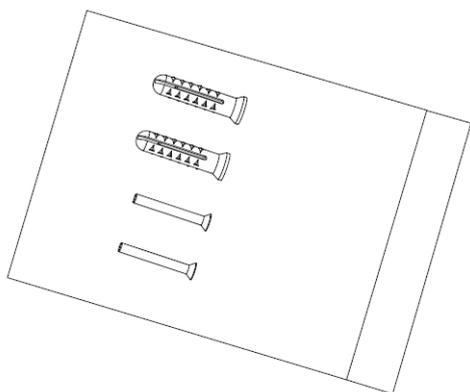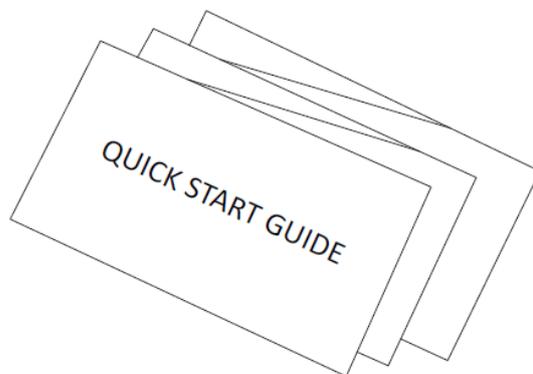
1 Packing List
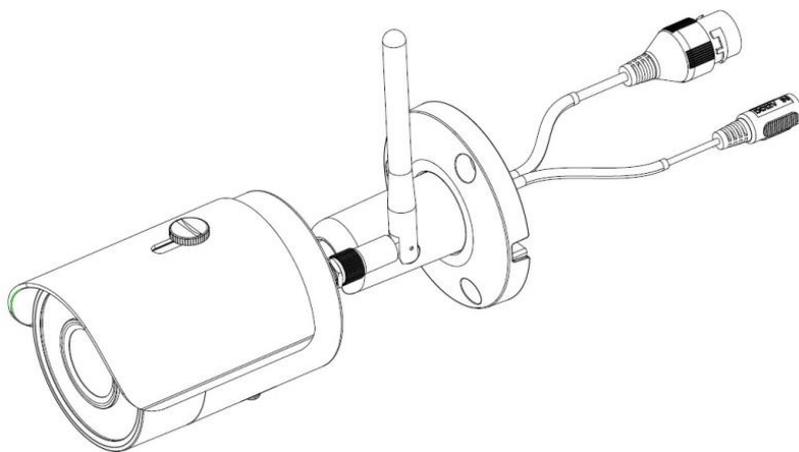
Device × 1

Screw Package × 1

QSG × 1

2 Product Appearance
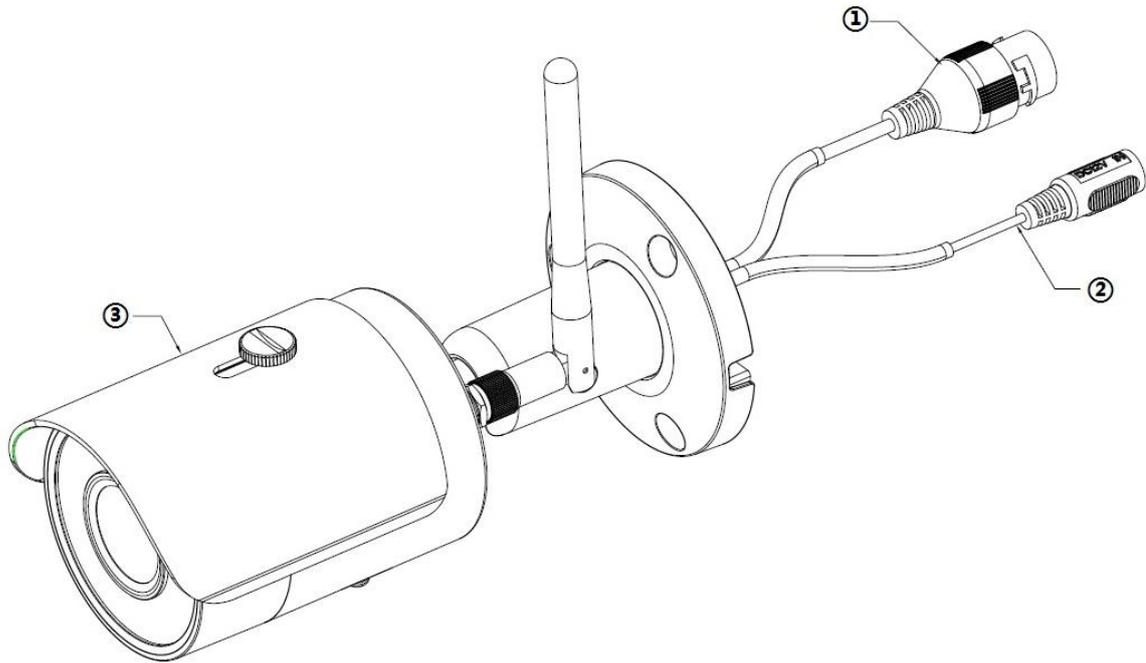
Figure 2-1

Please refer to the following sheet for more details about the device.

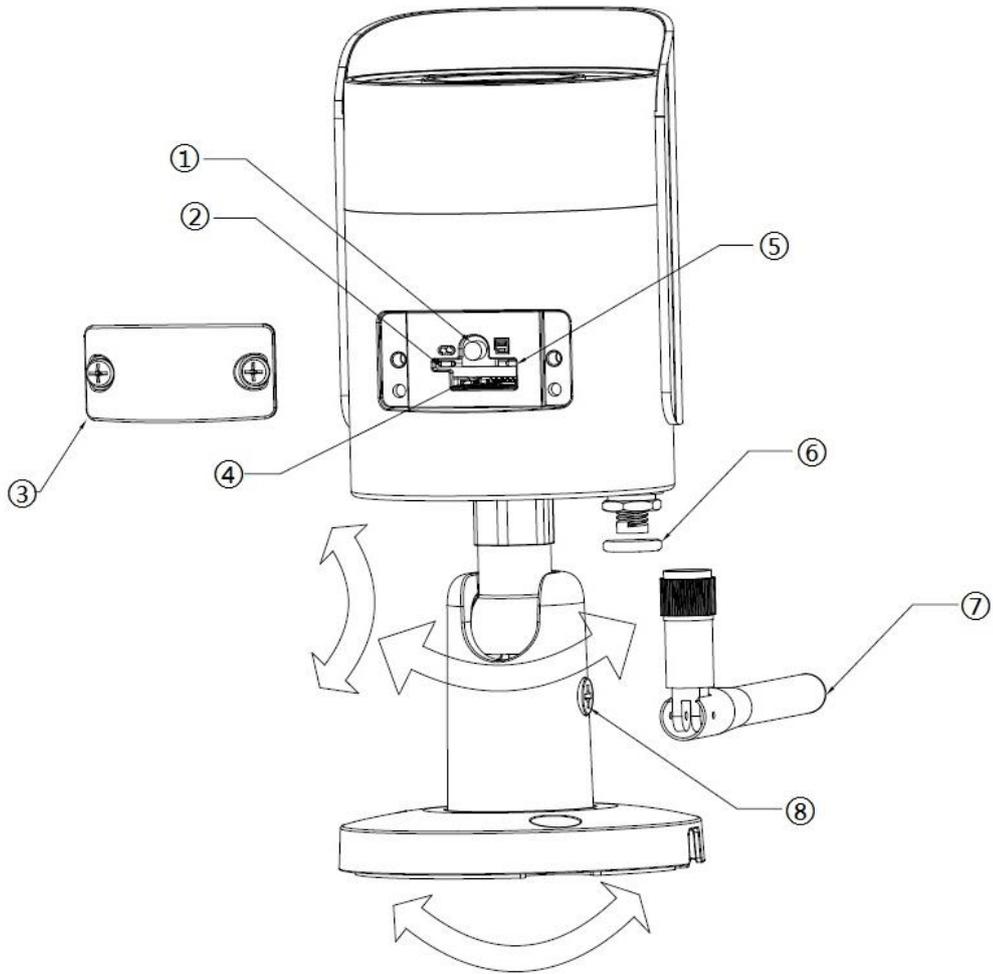| SN	Name
①	Ethernet port
②	Power port
③	Unit device

Sheet 2-1

Figure 2-2

Please refer to the following sheet for more details about each component.

SN	Name
①	Reset/ WPS (Wi-Fi Protected Setup) button
②	Indicator light 1
③	Lower cover
④	Micro SD card slot
⑤	Indicator light 2
⑥	Waterproof ring
⑦	Wi-Fi antenna
⑧	Locking screw

Sheet 2-2

Note:

For reset, long press for 8 seconds and then the light off; For WPS (Wi-Fi Protected Setup), one quick press.

Please refer to the following sheet for more details about status of indicator light.

Indicator light status	Device status
Red light stably on	Booting
Green light slow flashing	Booting completed, await Wi-Fi config, enter smart config status;
Green light quick flashing	Wi-Fi smart config in progress, including WPS (Wi-Fi Protected Setup), management frame, etc.
Green light stably on	Wi-Fi connection succeeded, operate normally.
Red and green lights flash alternately	Device upgrade
Red light slow flashing	Network disconnection.
Red light quick flashing	Device fail to boot up; alarm or SD card does not work

Sheet 2-3

3 Operate by Easy4ip APP

Step 1

Power on the device with power adapter.

Step 2

Connect your smart phone to your Wi-Fi network. Scan the "Easy4ip" QR on the packing box, download and install the Easy4ip APP.

Step 3

Open Easy4ip APP (take IOS as an example), tap login to login the APP, see Figure 3-1. Please register an account for your first use.
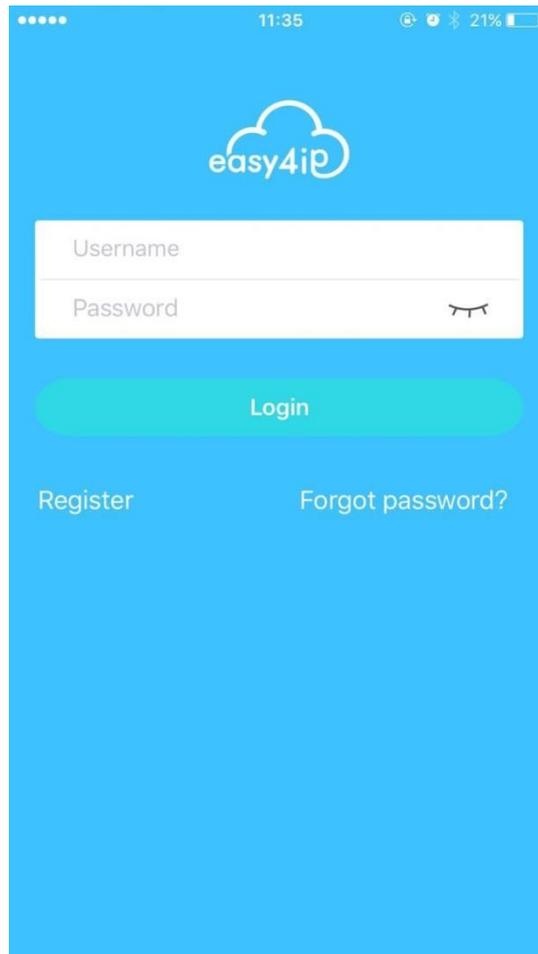

Figure 3-1

Step 4

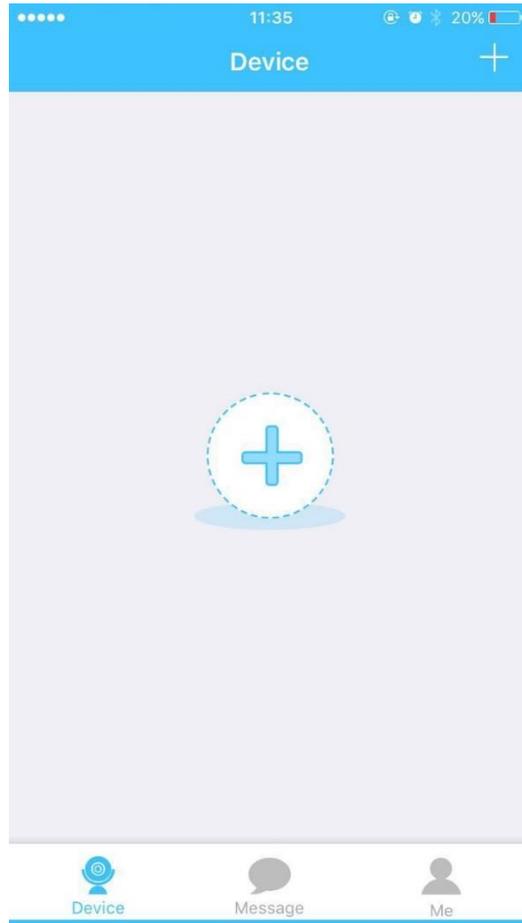Please tap "+" to add new devices after you log in your account.

Figure 3-2

Step 5

Scan the QR code on the back of the camera to get the SN, you can also tap "Continue without scanning" and manually input the SN number on the next page.
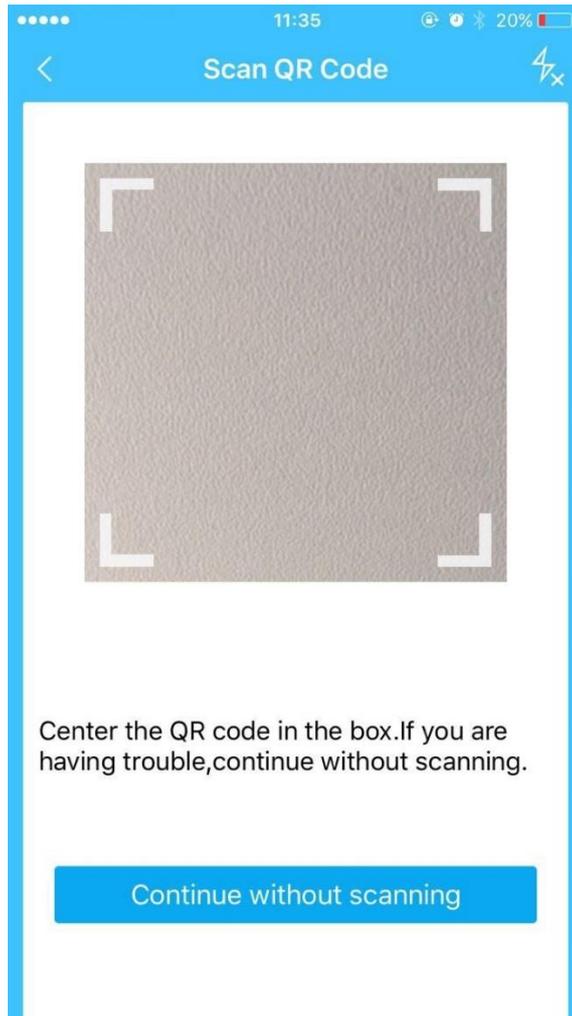
Figure 3-3

Step 6

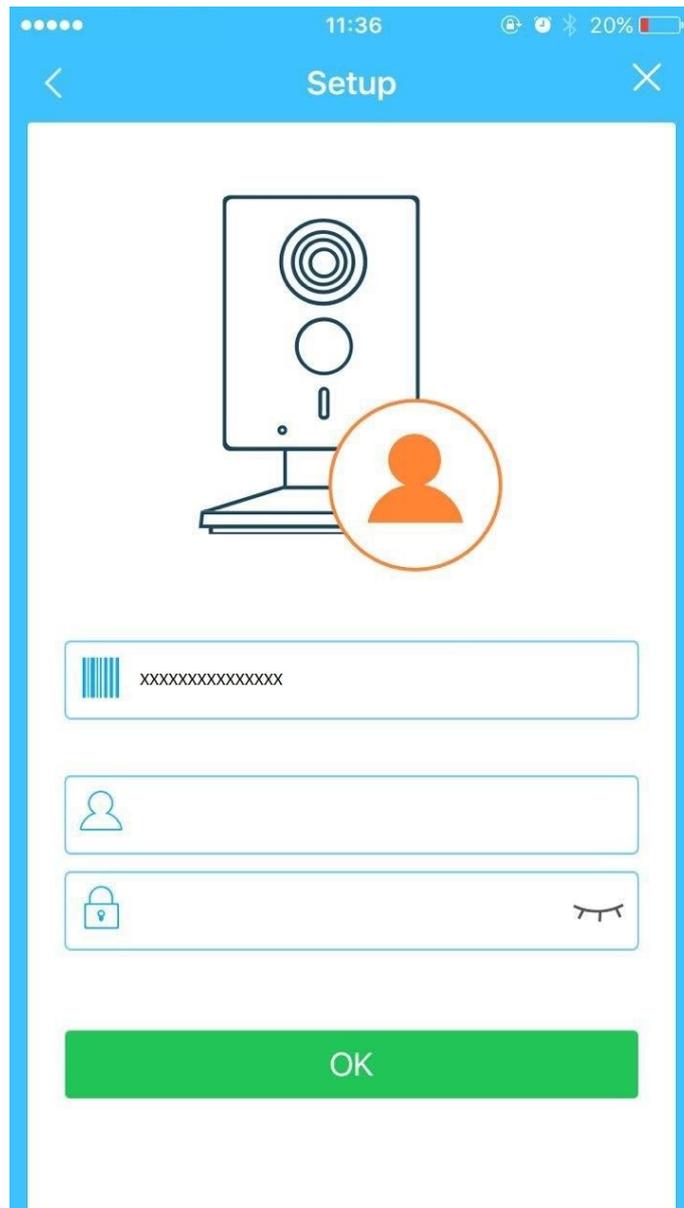Fill in the Username and Password of the new camera, both of which are admin by default.

Figure 3-4

Step 7

Select "Yes, config Wi-Fi", and fill in your Wi-Fi password, then tap "Next".
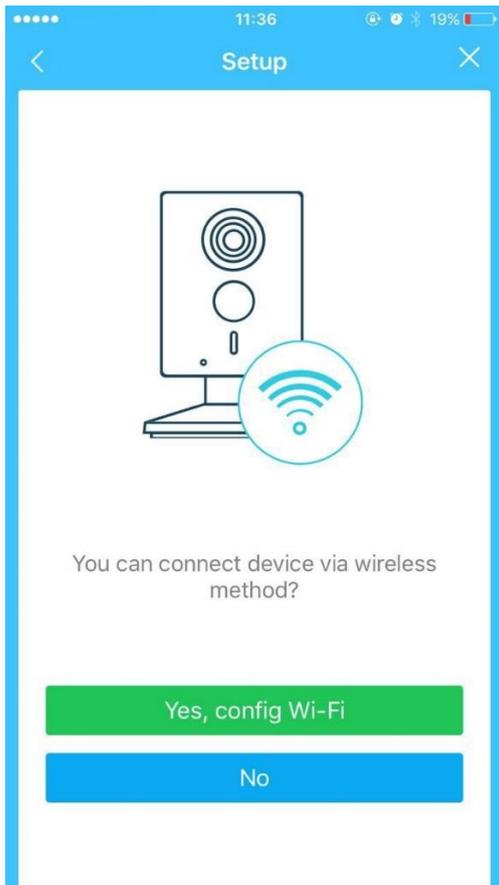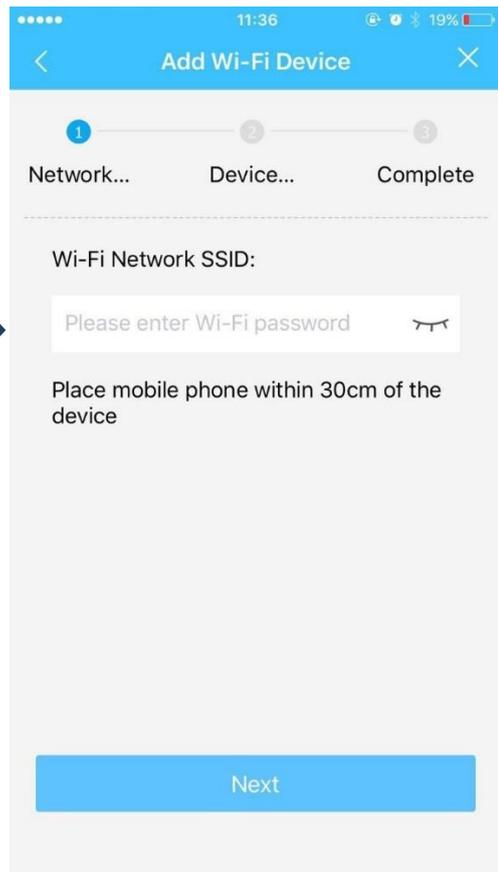
Figure 3-5

Figure 3-6

Step 8

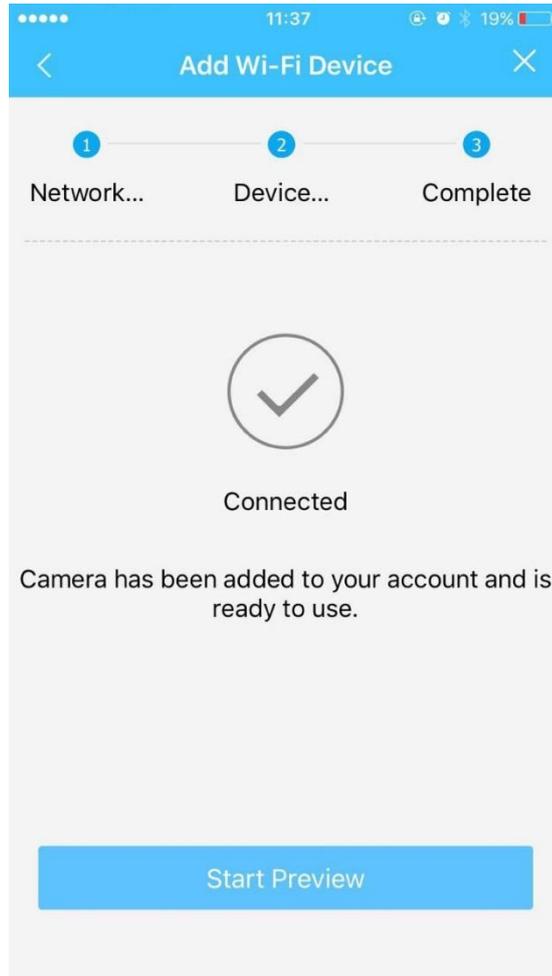Your Camera will be added to your account.

Figure 3-7

Note:

● If you have more cameras, please follow steps 4-8 to add them one by one.
● If you want to change the Wi-Fi signal, please reset the camera to factory default and repeat steps 4-8 to add the device.

4 Device Installation

Important

Before the installation, please make sure the installation environment can at least support 3x weight of the camera.
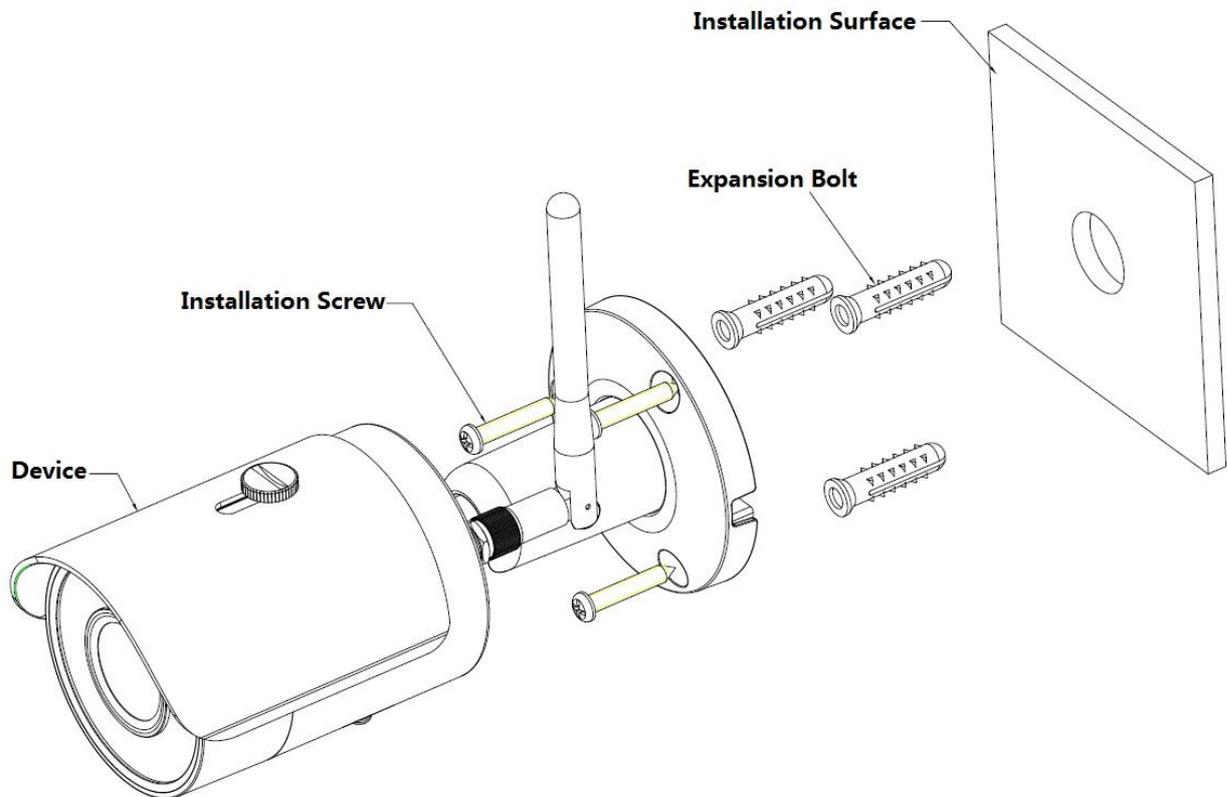

Figure 4-1

Please see Figure 4-1 and Figure 4-2.

Step 1

Dig holes on the installation surface (wall or ceiling).

Step 2

Open accessories bag, take out expansion bolt and insert it into the hole you just dug.

Step 3

Open accessories bag, take out installation screws. Tighten the screws to fix the device on the installation surface (wall or ceiling). You can move device sunshade back and forth. When you have fixed the device, you must tighten screws on sunshade.

Step 4

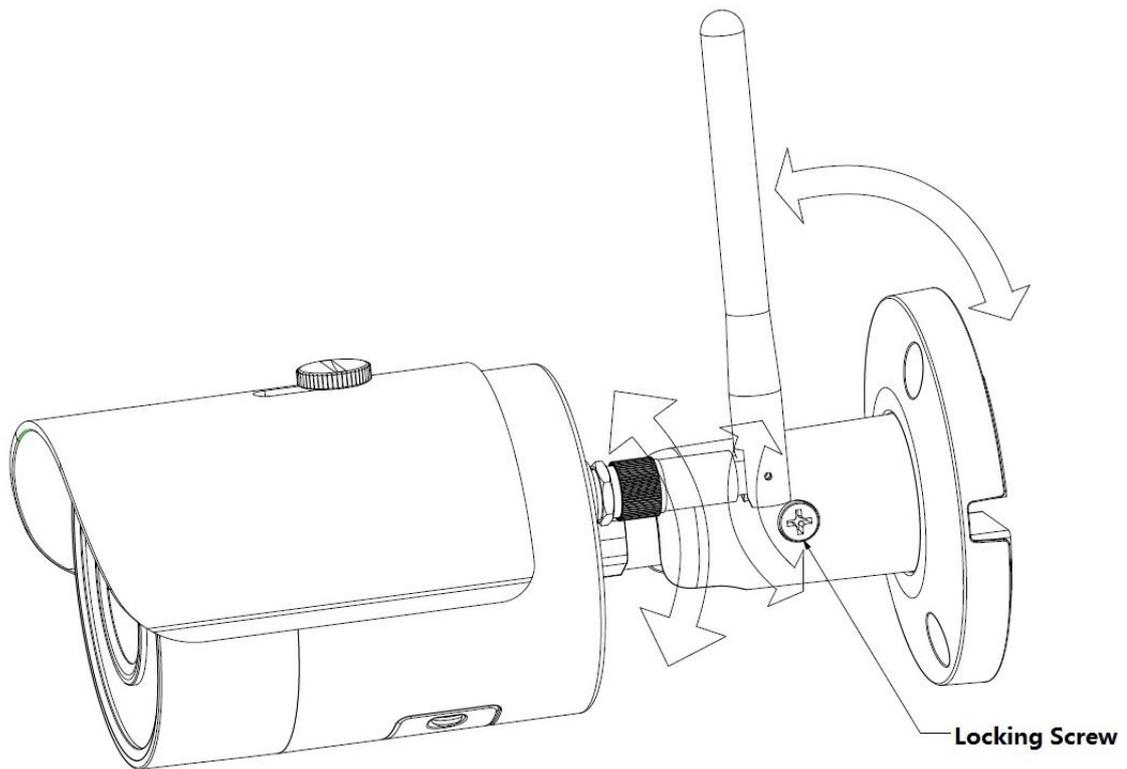Plug external wiring of the device properly.

Figure 4-2

Step 5
Use cross screwdriver (in accessories bag) to loosen adjusting screw.

Step 6
Adjust the device in all possible directions, and set its monitoring direction according to the requirements.

Step 7
Use cross screwdriver to tighten the adjusting screws.

Note:

- **This quick start guide is for reference only. Slight difference may be found in user interface.**

- **All the designs and software here are subject to change without prior written notice.**

- **All trademarks and registered trademarks mentioned are the properties of their respective owners.**

- **If there is any uncertainty or controversy, please refer to the final explanation of us.**

- **Please visit our website or contact your local service engineer for more information.**