
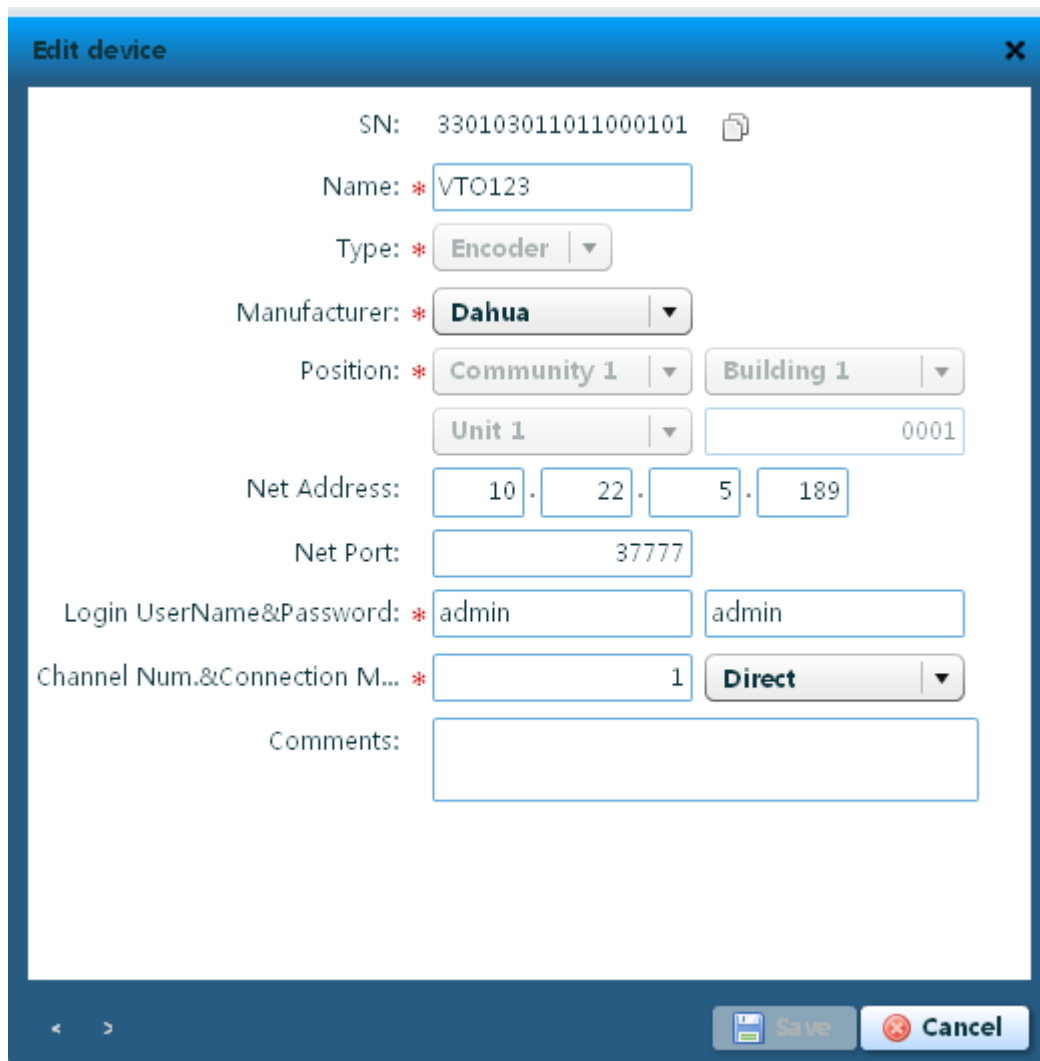


Config VTMS:



1. Please find the Device Mgr, and open it.
2. Then click the ADD to add a **Encoder device** like the follow picture.
Must input the Name, Type, Position, IP address, IPC's port, username and password, Channel (input by yourself)

A screenshot of a web-based form titled "Edit device". The form has a blue header bar with the title and a close button (X). Below the header, there is a white area with various input fields. At the top, there is a label "SN:" followed by the value "330103011011000101" and a copy icon. Below that, there are several rows of fields: "Name: *" with a text box containing "VTO123"; "Type: *" with a dropdown menu showing "Encoder"; "Manufacturer: *" with a dropdown menu showing "Dahua"; "Position: *" with three dropdown menus: "Community 1", "Building 1", and "Unit 1", followed by a text box containing "0001"; "Net Address:" with four text boxes containing "10", "22", "5", and "189"; "Net Port:" with a text box containing "37777"; "Login UserName&Password: *" with two text boxes, both containing "admin"; "Channel Num.&Connection M..." with a text box containing "1" and a dropdown menu showing "Direct"; and "Comments:" with a large empty text area. At the bottom of the form, there is a blue bar with a left arrow, a right arrow, a "Save" button with a floppy disk icon, and a "Cancel" button with a red X icon.

3. Please find the Channel Mgr, and open it.
4. Then click the ADD, and input the IPC's type, channel name, and address.
As follow picture:

Channel code: 330103011011000160

Channel type: * **Gun camera**

Channel name: * 1

Address: * **Community 1** **Building 1**

Unit 1 0001

App: Realtime display Video forwarding
 History playback Remote playback
 Control terminal Image storage

Edit

Desc:

OK Cancel

5. Choose the **Realtime display** and input the Encoder Device.

App: Realtime display Video forwarding
 History playback Remote playback
 Control terminal Image storage

Realtime display

Device: * VTO123 x

Channel id: * 1

Detail: * Console Preset point

Click here to choose the Encoder device

Automatch device OK Cancel