

iVMS-4200 VS Client Software

iVMS-4200 VS is versatile video management software for the DVRs, NVRs, IP cameras, encoders, etc. It provides multiple functionalities, including real-time live view, video recording, remote search and playback, file backup, alarm receiving, etc., for the connected devices to meet the needs of small and medium-sized projects.

With the flexible distributed structure and easy-to-use operations, iVMS-4200 VS client software is widely applied to the surveillance project of financial, public security, military, telecommunications, transport, electricity, education, water conservancy industries, etc.

Key Feature

Live View

- View settings and instant playback
- Live view on main/auxiliary screen
- Up to 64-window division for standard screen, and 48-window division for the wide screen
- Custom window division configurable
- Live view in fisheye mode for fisheye camera
- Master-slave tracking
- Resuming the latest live view status after client restart

Recording

- Recording both main stream and sub-stream for playback (if device supports)
- Remote manual recording
- Recording schedule for continuous recording, event recording and command recording
- Storing alarm pictures on Storage Server
- Providing SAN and Hybrid Storage Area Network configuration for Hybrid SAN device
- Video file overwritten and expired video file deleting

Event Management

- Camera linkage and multiple linkage actions
- Searching and exporting the linked pictures of events
- Audible warning and pop-up image when event triggered
- Receiving events in real-time, and retrieve the historical events
- Custom event sound as desired

Playback

- Local and remote playback
- Instant playback, normal playback, alarm input playback, event playback, ATM playback, VCA playback, and fisheye playback
- Up to 16-ch synchronous playback
- Locating the playback time accurately



- Skipping unconcerned video during VCA playback
- Searching video files which contain POS information
- Providing player in the installation directory to view the downloaded video file
- Merging video files when downloading by date

Statistics

- Data statistics of heat map, people counting, counting, road traffic, face retrieval, license plate retrieval, behavior analysis, face capture, queuing-up time analysis, queue status analysis and intersection analysis
- Showing large picture of face retrieval, license plate retrieval, and behavior analysis and the pictures can be exported for local storage

Network

- Encoding devices, Cloud P2P devices, storage servers, stream media servers connectable
- Checking device's online users
- NTP protocol for time synchronization
- Searching the active online devices
- Adding devices by Cloud P2P which have been added to the Cloud P2P account
- Adding devices by HiDDNS and IP Server; batch importing devices
- Two-way audio and broadcast function

PTZ Control

- Remote PTZ control, preset, patrol, and pattern settings
- 3D positioning, auxiliary focus, and wiper function
- Displaying analog speed dome's local menu via PTZ control panel
- PTZ control of one-touch patrol and one-touch park

General

- Applied in local area network and wide area network
- Facial identification device such as DeepinView and DeepinMind
- Transmission encryption when logging with SDK over TLS mode
- Remote configuration for added devices
- User permission management
- Creating a password to activate devices. For device which supports Hik-Connect, enabling Hik-Connect service when activating it
- Resetting device password
- Hardware decoding for live view and playback
- Setting email when activating devices, and resetting the password of devices by the email
- Downloading video files to PC
- Log search and backup
- Importing and exporting configuration file
- Auto backing up database according to the configured schedule

Specification

Model		iVMS-4200 VS	
Database		SQLite (encrypted)	
Client	General	User	50 users and one super user
		Encoding Device	256
		Group	256 groups 256 channels for each group
		Channel	256 channels for all groups
		Storage Server	16
		Stream Media Server	16
	Video	Live View	64-ch live view at a time on one screen
		Auxiliary Screen Preview	One main screen and 3 auxiliary screens for live view
		Playback	16-ch playback at a time
		Synchronous Playback	16-ch synchronous playback
Downloading		16-ch downloading tasks at a time	
Storage Server	Recording Performance	64-ch × 2 Mbps at a time	
	VOD Performance	64-ch × 2 Mbps at a time	
	User	32	
	iVMS-4200 VS Client	128 clients connected to the Storage Server	
Stream Media Server	Incoming/Outgoing Stream	64-ch incoming video stream 200-ch outgoing video stream	
Supported Language		Arabic, Bulgarian, Croatian, Czech, Danish, Dutch, English, Finnish, French, German, Greek, Hungarian, Italian, Japanese, Korean, Lithuanian, Norwegian, Polish, Portuguese, Portuguese (Brazil), Romanian, Russian, Serbian, Simplified Chinese, Slovak, Slovenian, Spanish, Swedish, Thai, Traditional Chinese, Turkish, Ukrainian, Vietnamese	

System Requirement


* For high stability and good performance, the following system requirements must be met.

Features	Requirements
Operating System	Microsoft® Windows 7 SP1 and above (32-bit or 64-bit) Microsoft® Windows 8.1 (32-bit or 64-bit) Microsoft® Windows 10 (32-bit or 64-bit) Microsoft® Windows Server 2008 R2 and above (32-bit or 64-bit) Microsoft® Windows Server 2012 R2 and above (32-bit or 64-bit)
CPU	Intel® Core™ i3 Processors and above
Memory	2 GB or above
Resolution	1280×768 and above

Live View Performance

H.264											
Resolution	Bit Rate (Mbps)	Frame Rate (fps)	CPU: i3-8100 Graphics Card: GT1030 D5 Windows 7 64-bit			CPU: i5-4590@3.3GHz Graphics Card: GTX970 Windows 7 64-bit			CPU: i7-6700k@4GHz Graphics Card: GTX1070 Windows 7 64-bit		
			Channels	CPU(%)	Memory(MB)	Channels	CPU(%)	Memory(MB)	Channels	CPU(%)	Memory(MB)
720P	3	30	-	-	-	25	78-89	1,330	41	81-90	1,286
1080P	6	30	-	-	-	11	65-82	460	19	75-89	1,242
8MP	12	30	-	-	-	3	79-90	2,099	5	63-75	1,454
4CIF	1	30	57	58-78	1,577	-	-	-	-	-	-
H.264+											
Resolution	Bit Rate (Mbps)	Frame Rate (fps)	CPU: i3-8100 Graphics Card: GT1030 D5 Windows 7 64-bit			CPU: i5-4590@3.3GHz Graphics Card: GTX970 Windows 7 64-bit			CPU: i7-6700k@4GHz Graphics Card: GTX1070 Windows 7 64-bit		
			Channels	CPU(%)	Memory(MB)	Channels	CPU(%)	Memory(MB)	Channels	CPU(%)	Memory(MB)
720P	3	30	24	62-84	1,208	27	63-90	1,382	48	53-80	1,125
1080P	6	30	11	60-89	1,024	12	61-90	1,536	21	80-90	1,161
8MP	12	30	-	-	-	3	70-91	686	6	64-92	1,249
H.265											
Resolution	Bit Rate (Mbps)	Frame Rate (fps)	CPU: i3-8100 Graphics Card: GT1030 D5 Windows 7 64-bit			CPU: i5-4590@3.3GHz Graphics Card: GTX970 Windows 7 64-bit			CPU: i7-6700k@4GHz Graphics Card: GTX1070 Windows 7 64-bit		
			Channels	CPU(%)	Memory(MB)	Channels	CPU(%)	Memory(MB)	Channels	CPU(%)	Memory(MB)
720P	3	30	14	69-91	1,054	15	70-90	850	26	71-89	1,251
1080P	6	30	8	64-81	1,105	8	60-85	1,239	15	70-88	1,284
8MP	12	30	-	-	-	2	77-92	666	3	51-64	1,075

Typical Application

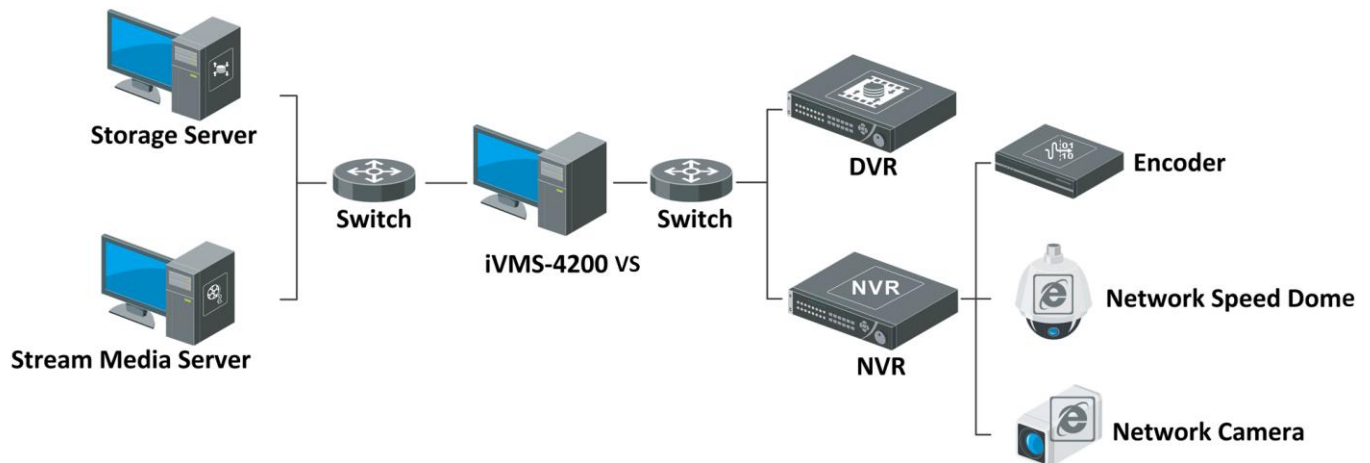

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 [216]521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com